

ETE10X

Electric Oven - 10 GN 1/1_ 10GN 60x40



TECHNICAL FEATURES

- Heating of cooking chamber with high performance INCOLOY heating elements.
- Adjustable fan speed in 3 position.
- USB port for uploading and saving recipes and for firmware updating.
- Double-glazed ventilated door (panels can be opened for easy cleaning).
- AISI 304 cooking chamber with rounded corners.
- Height adjustable feet.
- Optional automatic washing system -ETE10XW
- "One Touch" cooking mode.
- Touch screen control board: 9 phases program with parameter control for chamber temperature, core temperature, time and humidity.
- Scheduled departure of cooking.
- Cooking with "Rack Control"
- Interface "Recipe Tuner"
- Preset cooking programmes.
- ΔT cooking.
- Multi level cooking with "Easy service".
- Hold function.
- Cooldown during cooking.
- Bivalent GN (1/1) and EN (60x40) racks runner.

GIORIK PATENT

Convection, steam, convection with steam in combi mode, humidification and dehumidification, cook with core probe, hold in temperature for overnight cooking.

These are the Easyair's functions, an oven line which is suitable to take either gastronorm and confectionery size trays and containers.

RecipeTuner


The RecipeTuner interface makes it possible to modify and personalise the various programs simply and intuitively. RecipeTuner changes according to the type of cooking set, to regulate cooking, browning, degree of humidity and of leavening.

EasyService

level control cooking

The new Rack Control enables different dishes to be cooked at the same time at various levels. What's more, with EasyService, a new Rack Control function, all the dishes can be served at the same time.


5" TOUCH SCREEN PANEL:

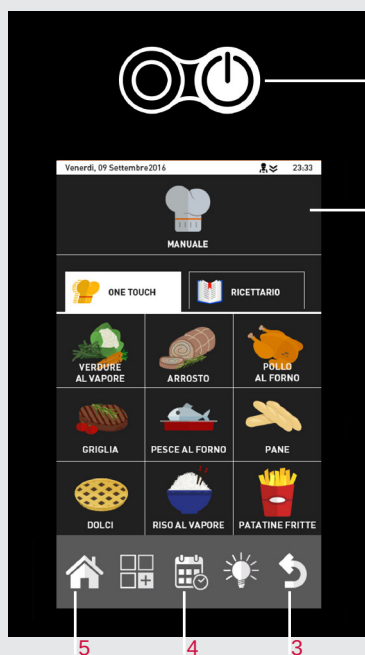

1. On/Off switch.
2. Touch Screen Panel.
 - Temperature control from 50° to 300°C
 - Time control from 1' to 120'; infinite function.
 - Cooking modes: convection, steam, combi convection/steam.
 - "One Touch" cooking mode: immediate start of the cooking cycle with "one touch programs".
 - Preset cooking programmes. Possibility of controlling 9 cooking phases for each programme.
 - Scheduled departure of cooking.
 - Cooking with "Rack Control"
 - Interface "Recipe Tuner"
 - Delta T cooking.
 - Cooking with probe.
 - Multi level cooking with "Easy service"
 - Fan with 3 different speeds.
 - Motorised vent valve opening .
3. Back Key
4. "Scheduled Departure" key.
5. Main Menu key.


Single control by means of just one jog/dial encoder knob.

ETE10X
Electric Oven - 10 GN 1/1_ 10GN 60x40

 (A x B x C) mm	VOL./PESO Vol./Weight m ³ /kg	VAC 400V-3N 50Hz (60 Hz optional) kW	POTENZA EL. CAMERA Oven cavity el. power kW	DISTANZA TRA LE TEGLIE Gap between the trays mm	DIM. CAMERA Cavity net dimension mm
870x749x1023 10 GN 1/1 10 EN 60x40	0,9 / 112	17,3	16,6	74	645x800x450

ACCESSORIES

- Stand TSP1000
- Racks for stand TSP1000 cod. 2017692
- Proofer CLP0810
- Proofer CL900
- Proofer CL912
- Hood 7080516
- Condensation hood 7080522
- Core probe 6000116
- Washing kit
- USB port

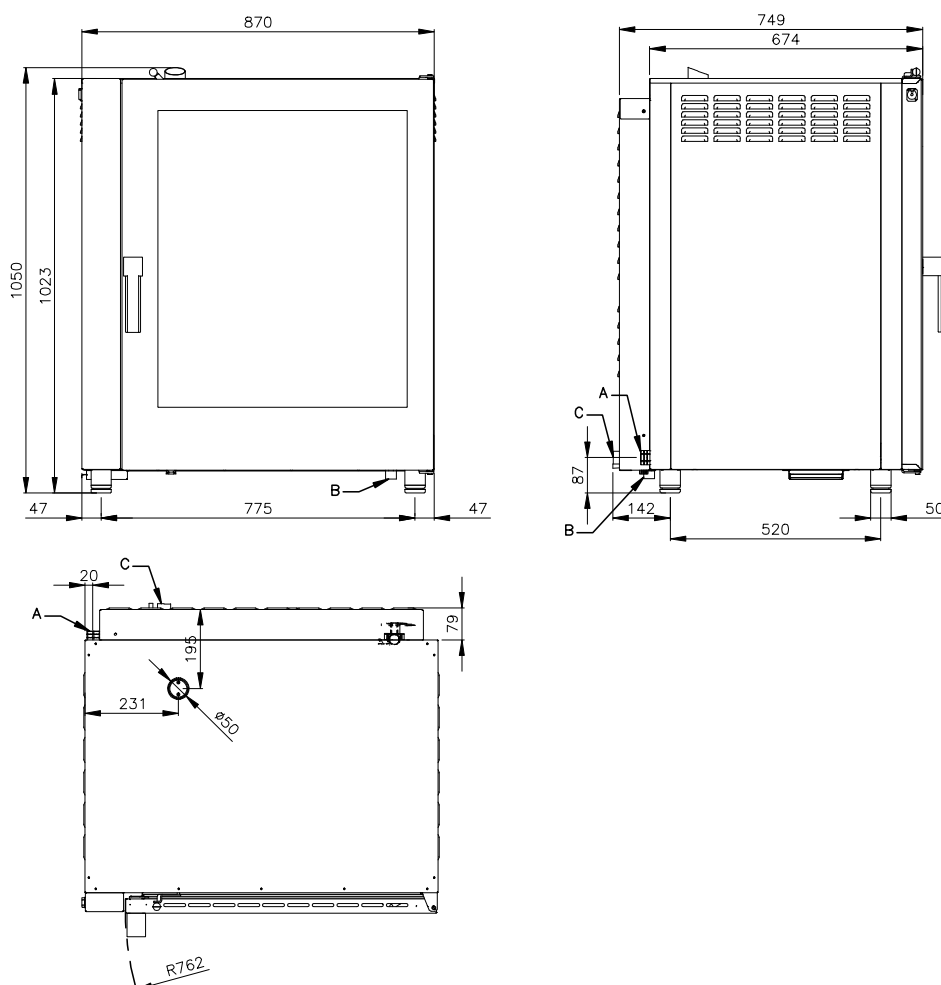

- A Electrical connection
- B Water inlet (G3/4)
- C Drain (Ø32)